

# SPECIFICATIONS


## Pump Kits

	S 32 X		S 36 X	
	2023-5 130/80 MPS U.S.	Metric	2025-5 120/80 MPS U.S.	Metric
Theor. Concrete Output Per Hour (cubic yards - cubic meters)	211	161	178	136
Maximum Pressure on Concrete (psi - bar)	950	65	1002	70
Maximum Strokes Per Minute	32	32	24	24
Material Cylinder Diameter (in. - mm)	9	230	10	254
Material Cylinder Stroke Length (in. - mm)	79	2000	79	2000
Differential Cylinder Size (in. - mm)	5.1	130	4.7	120
Maximum Aggregate Size (in. - mm)	2.5	63.5	2.5	63.5

## Boom Specifications


	S 32 X		S 36 X	
	U.S.	Metric	U.S.	Metric
Pipeline Diameter (in. - mm)	5	125	5	125
Vertical Reach (ft.-in. - m)	104-11	32	115-6	35.2
Horizontal Reach (ft.-in. - m)	91-11	28	102-6	31.2
Net Horizontal Reach (ft.-in. - m)	83-7	25.5	93-9	28.6
Unfolding Height (ft.-in. - m)	24-9	7.5	27-4	8.3
Section Lengths				
First Section (ft.-in. - m)	25-6	7.7	27-7	8.4
Second Section (ft.-in. - m)	22-9	6.9	25-4	7.7
Third Section (ft.-in. - m)	22-10	6.9	25-6	7.8
Fourth Section (ft.-in. - m)	20-10	6.3	24-2	7.4
Slewing Range (degrees)	730°	730°	730°	730°
End hose length (ft. - m)	12	3.6	12	3.6

Specifications are subject to change without prior notice.

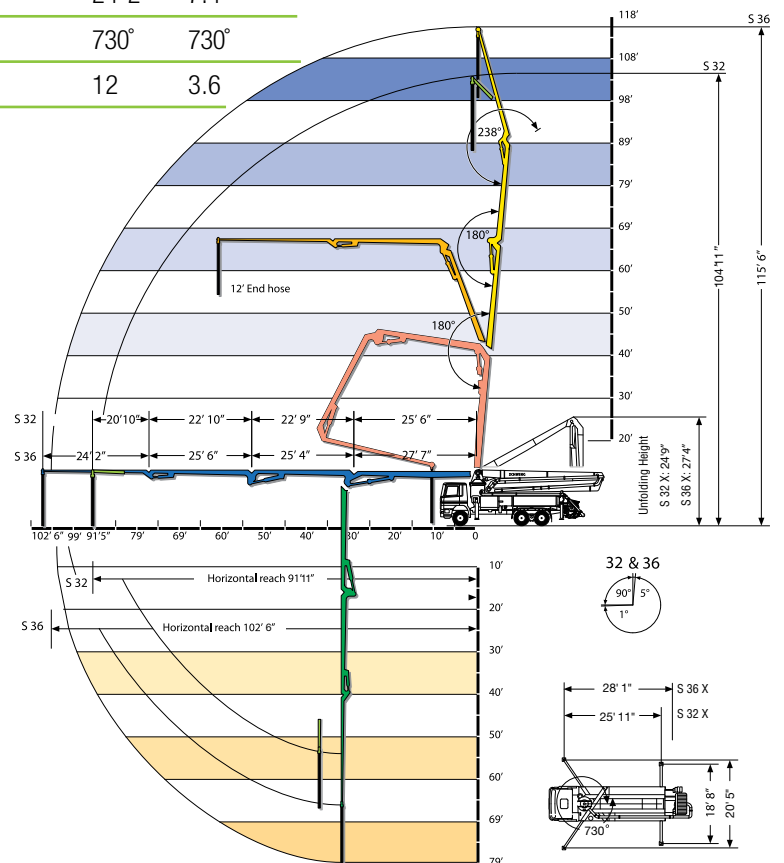

## S 32 X / S 36 X

(Dimensions shown apply to Mack truck mounted units and may vary unit to unit or for other makes and models of trucks.)

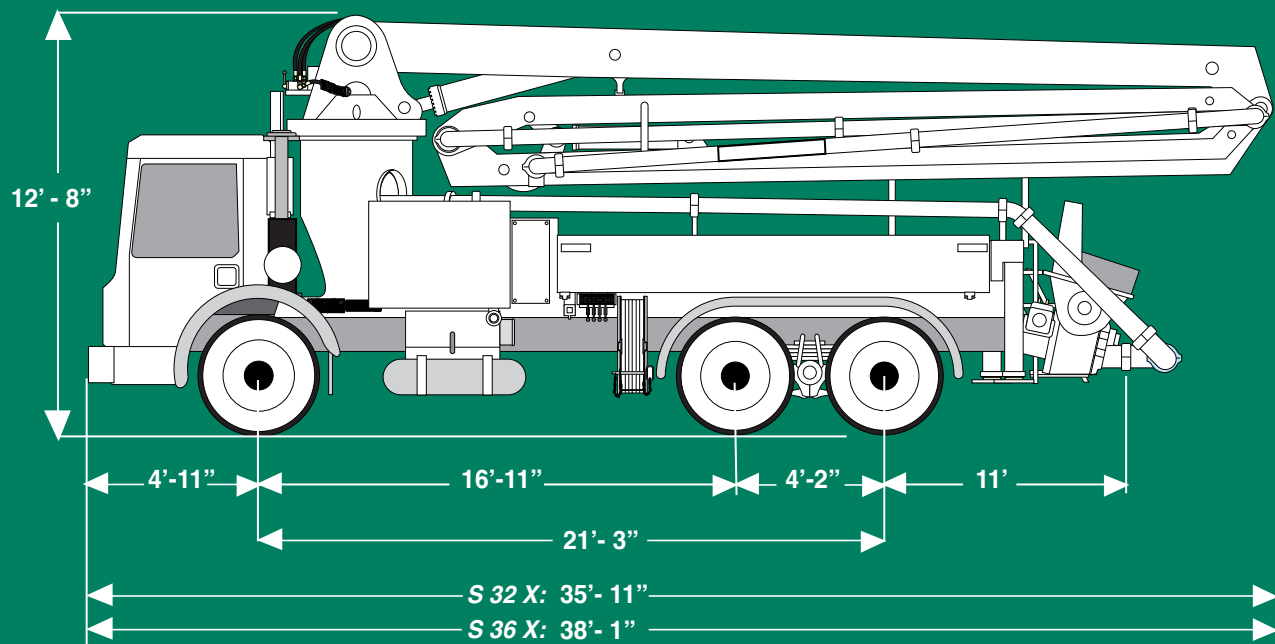

## SCHWING-STETTER MOVES CONCRETE. **WORLDWIDE.**

Wherever concrete is produced and moved is where you will find Schwing-Stetter machinery.

With plants in Germany, Austria, USA, Brazil, Russia, China and India as well as with more than 100 sales and service facilities, the group of companies is always close to the customer.

Our wide range of products with something for every application is what makes Schwing-Stetter the No. 1 system supplier for concrete machinery worldwide.



**CONCRETE  
BATCHING PLANTS**



**TRUCK  
MIXERS**



**TRUCK-MOUNTED  
CONCRETE PUMPS**



**STATIONARY  
CONCRETE PUMPS**



**SEPARATE  
PLACING BOOMS**



**CONCRETE  
RECYCLERS**

